

Part Number	RPC3N706M8	Revision	A
Customer P/N		Revision	A
Capacitance	70	uF.	
Voltage	450	VAC	Tolerance 5%
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature		°C.	
Dissipation Factor	0.0015	maximum	@ 60 Hz.

MOTOR
Capacitors, Inc.




Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	2.36	0.03
Height (H)	4.65	0.03
M8 Stud	0.40	
Wire Length (G)	5.50	min
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	Black	

Dimensions in inches

	Stamping
	Logo / Italfarad
	RP-3 SH S0
	70 uF. +/-5% 450 VAC
	25/085/21 50/60 Hz
	RU, cRU, VDE, CE
	Datecode
Made in Romania	

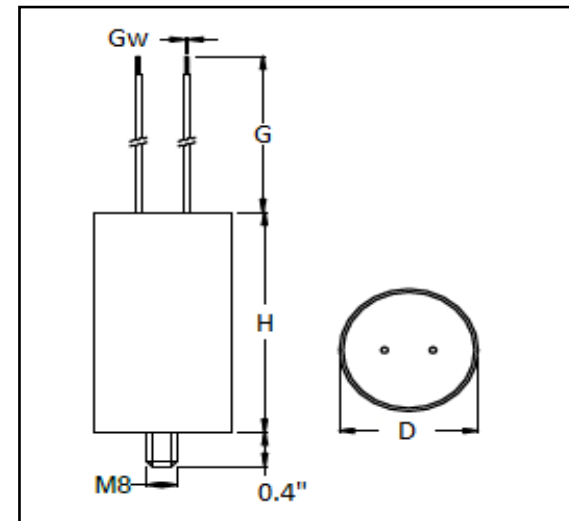

--

Engineer J.D. Aldana
Date March 17, 2016