

Part Number	RPC3N806M8		Revision	A
Customer P/N			Revision	A
Capacitance	80	uF.	Tolerance	5%
Voltage	450	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	Insulated Wire Leads			
Operating Temperature	-25	85	°C.	
Dissipation Factor	0.0015	maximum	@ 60 Hz.	

MOTOR


Capacitors, Inc.




Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	2.36	0.03
Height (H)	4.62	0.03
M8 Stud	0.40	
Wire Length (G)	5.50	min
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	Black	

Dimensions in inches

Stamping 	Logo / Italfarad
	RP-3 SH S0
	80 uF. +/-5% 450 VAC
	25/085/21 50/60 Hz
	RU, cRU, VDE, CE
	Datecode

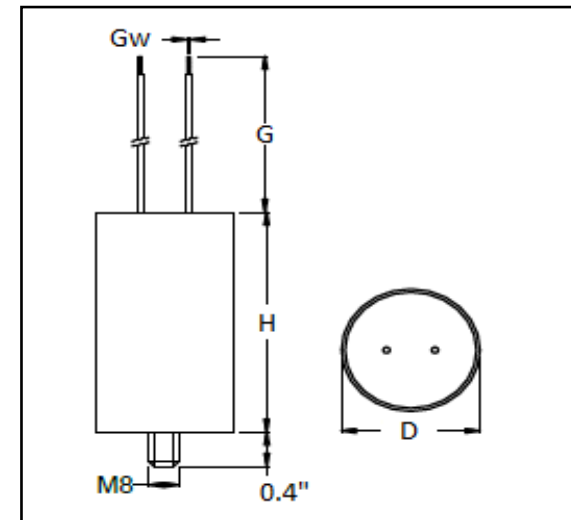

Engineer J.D. Aldana
 Date April 25, 2018

