

| | | | | |
|-----------------------|--------------------------|---------|-----------|----|
| Part Number | RPC3Y405M8 | | Revision | |
| Customer P/N | | | Revision | |
| Capacitance | 4 | uF. | Tolerance | 5% |
| Voltage | 450 | VAC | | |
| Dielectric | Metallized Polypropylene | | | |
| Terminal Type | Insulated Bipolar Cable | | | |
| Operating Temperature | -25 | 85 | °C. | |
| Dissipation Factor | 0.0015 | maximum | @ 60 Hz. | |

MOTOR
Capacitors, Inc.




Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

| | Dimension | Tolerance |
|-----------------|-----------|-----------|
| Diameter (D) | 1.10 | 0.03 |
| Height (H) | 2.20 | 0.03 |
| M8 Stud | 0.40 | ref. |
| Wire Length (G) | 9.84 | 0.50 |
| Wire Gauge (Gw) | 18 | AWG |
| Wire Color (Cw) | Black | |

Dimensions in inches

Stamping

Logo / Italfarad
RP-3 SH S0
4 uf., +/- 5% 450 VAC
25/085/21 50/60 Hz
RU, cRU, VDE, CE
Datecode

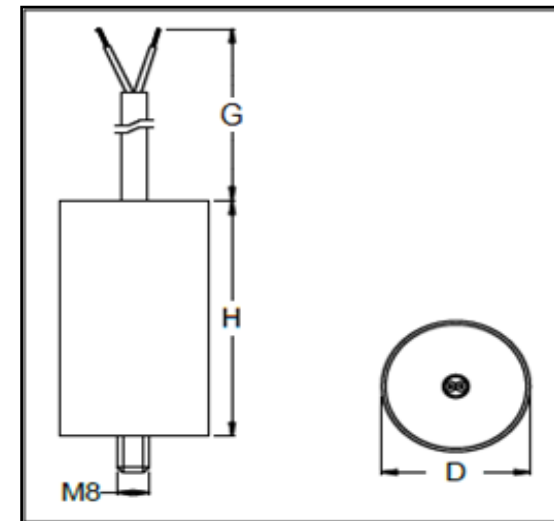

Note: Y style terminal

Engineer _____
Date _____

J.D. Aldana
March 8, 2018