

Part Number	RPC75Y504M8		Revision	A
Customer P/N			Revision	A
Capacitance	0.5	uF.	Tolerance	5%
Voltage	750	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	Insulated Bipolar Cable			
Operating Temperature	-25	85	°C.	
Dissipation Factor	0.0015	maximum	@ 60 Hz.	


MOTOR
Capacitors, Inc.




Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	1.18	0.03
Height (H)	3.70	0.03
M8 Stud	0.40	ref.
Wire Length (G)	11.80	min
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	Black	

Dimensions in inches

Stamping	Logo / Italfarad
	RP-75 SH S0
	0.5 uf., +/- 5% 750 VAC 25/085/21 50/60 Hz
	Datecode
	Made in Romania

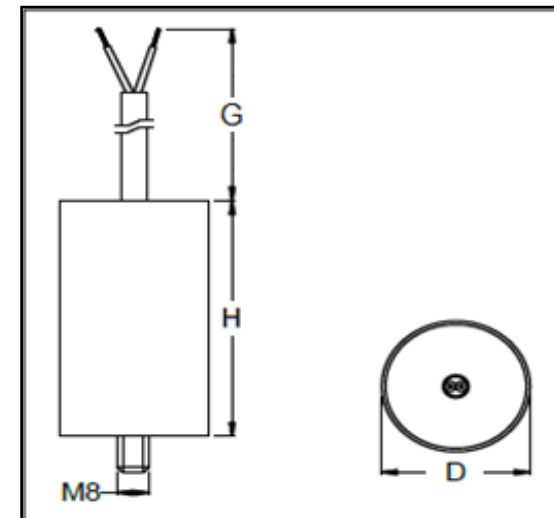

Note: Y style terminal

Engineer J.D. Aldana
Date March 17, 2016