

Part Number	RPC75Y504M8	Revision	A
Customer P/N		Revision	A
Capacitance	0.5	uF.	5%
Voltage	750	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Bipolar Cable		
Operating Temperature	-25	85	°C.
Dissipation Factor	0.0015	maximum	@ 60 Hz.

MOTOR
Capacitors, Inc.




Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	1.18	0.03
Height (H)	3.70	0.03
M8 Stud	0.40	ref.
Wire Length (G)	11.80	min
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	Black	

Dimensions in inches

Stamping	Logo / Italfarad
	RP-75 SH S0
	0.5 uf., +/- 5% 750 VAC
	25/085/21 50/60 Hz
	"CE" Approved
	Datecode

Note: Y style terminal

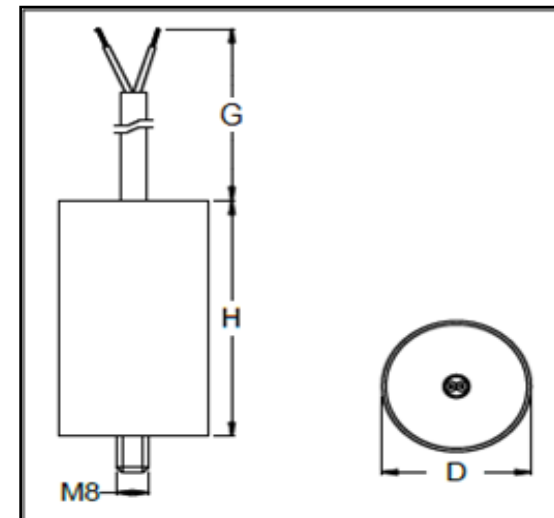

Engineer J.D. Aldana
Date March 17, 2016