

Part Number	RPN2F107M8	Revision	A
Customer P/N		Revision	A
Capacitance	100	uF.	Tolerance 5%
Voltage	450	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature	-25	85	°C.
Dissipation Factor	0.0015	maximum	@ 60 Hz.

MOTOR
Capacitors, Inc.




Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	2.37	0.03
Height (H)	4.75	0.03
M8 Stud	0.40	

Dimensions in inches

	Stamping
	Logo / Italfarad
	RP-2 SH S0
	100 uF. +/-5% 450 VAC
	25/085/21 50/60 Hz
	RU, cRU, VDE, CE
Datecode	
Made in Romania	

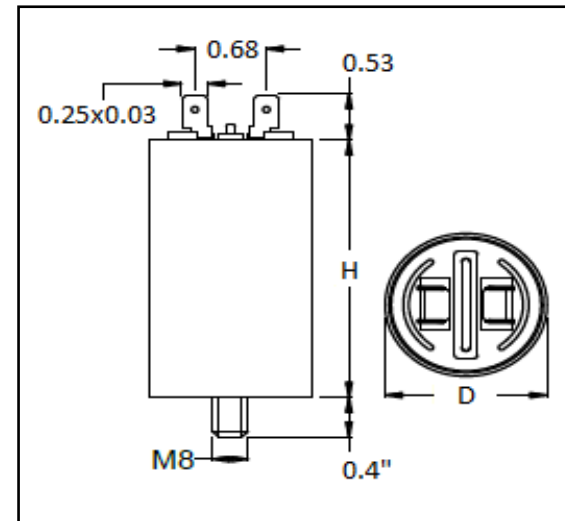

(with Mounting Stud, Lockwasher, and Hex Nut)

Engineer J.D Aldana
Date March 15, 2016