

Part Number	RPN2F306-M1	Revision	
Customer P/N	603209	Revision	
Capacitance	30	uF.	Tolerance 5%
Voltage	450	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature	-25	85	°C.
Dissipation Factor	0.0015	maximum	@ 60 Hz.


MOTOR


Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	1.77	0.02
Height (H)	3.54	0.04

Dimensions in inches

Stamping	Italfarad
	RP-2 SH S0
	30 uF. +/-5% 450 VAC
	25/085/21 50/60 Hz
	RU, cRU, VDE, CE
	Datecode
	

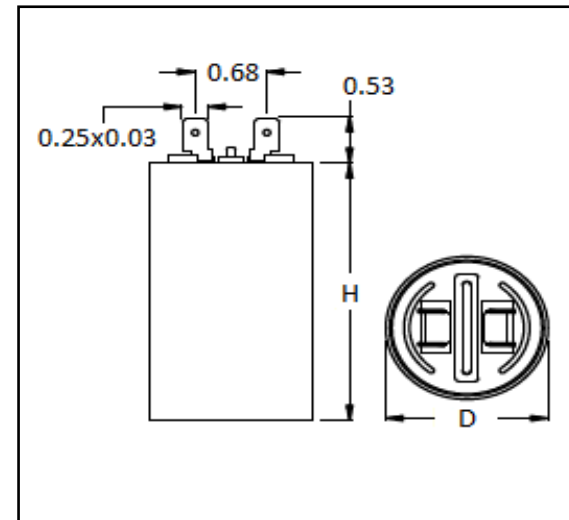

(NO Mounting Stud)

Engineer J.D. Aldana
 Date April 22, 2021