

Part Number	RPN2F806M8	Revision	A
Customer P/N		Revision	A
Capacitance	80	uF.	Tolerance 5%
Voltage	450	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature		°C.	
Dissipation Factor	0.0015	maximum @ 60 Hz.	

MOTOR
Capacitors, Inc.



Motor Capacitors, Inc.

335 Beinoris Drive

Wood Dale, Illinois 60191

773-774-6666 (Phone) | 773-774-6690 (Fax)

www.capacitorindustries.com


info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	2.16	0.03
Height (H)	4.80	0.03
M8 Stud	0.40	

Dimensions in inches

Stamping

Logo / Italfarad
RP-2 SH S0
80 uF. +/-5% 450 VAC
25/085/21 50/60 Hz
RU, cRU, VDE, CE
Datecode
Made in Romania

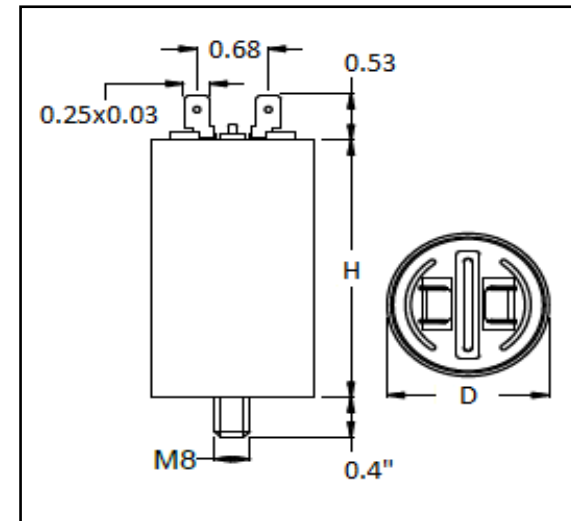

(with Mounting Stud, Lockwasher, and Hex Nut)

Engineer

J.D. Aldana

Date

March 15, 2016