

Part Number	RPN3F256M8		Revision	
Customer P/N			Revision	
Capacitance	25	uF.	Tolerance	5%
Voltage	450	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	Dual .250" X .03" Quick Connect Terminals			
Operating Temperature	-25	85	°C.	
Dissipation Factor	0.0015	maximum	@ 60 Hz.	

MOTOR
Capacitors, Inc.




Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	1.77	0.03
Height (H)	3.66	0.03
M8 Stud	0.40	

Dimensions in inches

Stamping

Logo / Italfarad
RP-3 SH S0
25 uF. +/-5% 450 VAC
25/085/21 50/60 Hz
RU, cRU, VDE, CE
Datecode
Made in Romania

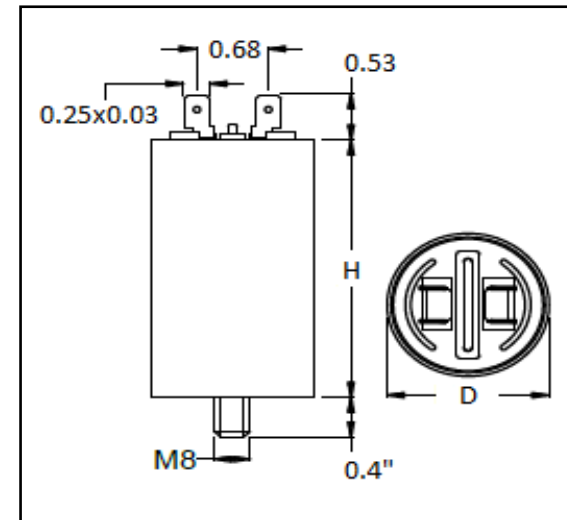

(with Mounting Stud, Lockwasher, and Hex Nut)

Engineer J.D Aldana
Date December 22, 2016