

Part Number	RPN3F706M8	Revision	A
Customer P/N		Revision	A
Capacitance	70	uF.	Tolerance 5%
Voltage	450	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature		°C.	
Dissipation Factor	0.0015	maximum @ 60 Hz.	

**MOTOR**  
Capacitors, Inc.




Motor Capacitors, Inc.  
335 Beinoris Drive  
Wood Dale, Illinois 60191  
773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Diameter (D)	2.36	0.03
Height (H)	4.80	0.03
M8 Stud	0.40	

Dimensions in inches

**Stamping**

Logo / Italfarad  
RP-3 SH S0  
70 uF. +/-5% 450 VAC  
25/085/21 50/60 Hz  
RU, cRU, VDE, CE  
Datecode  
Made in Romania

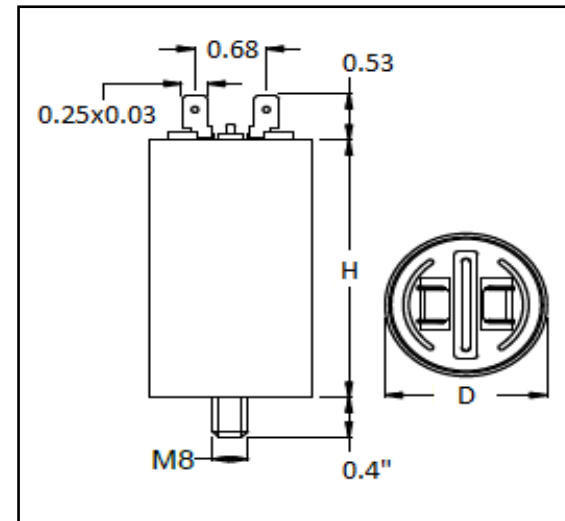

(with Mounting Stud, Lockwasher, and Hex Nut)

Engineer J.D Aldana  
Date March 15, 2016