

Part Number	RPN6E605M8-M1		Revision			
Customer P/N			Revision			
Capacitance	6	uF.	Tolerance	5%		
Voltage	500	VAC				
Dielectric	Metallized Polypropylene					
Terminal Type	Single .250" X .03" Quick Connect Terminals					
Operating Temperature	-25	85	°C.			
Dissipation Factor	0.0015	maximum	@ 60 Hz.			

MOTOR

Capacitors, Inc.

Motor Capacitors, Inc.

335 Beinoris Drive

Wood Dale, Illinois 60191

773-774-6666 (Phone) | 773-774-6690 (Fax)


www.capacitorindustries.com

info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	1.38	0.02
Height (H)	2.25	0.04
M8 Stud	0.40	

Dimensions in inches

Stamping	Motor Cap / Italfarad
	RP-6 SH S0
	6.0uF. +/-5% 500 VAC
	25/085/21 50/60 Hz
	RU, cRU, VDE, CE
	Datecode
	

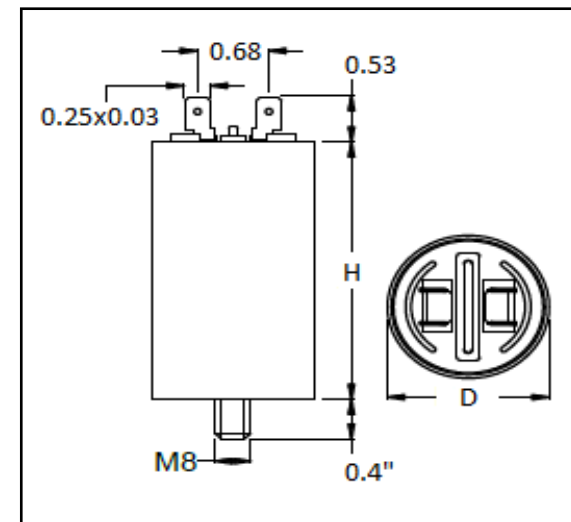

(with Mounting Stud, Lockwasher, and Hex Nut)

Engineer J.D. Aldana
Date March 4, 2021