

Part Number	RPN6F405M8	Revision	A
Customer P/N		Revision	A
Capacitance	4	uF.	Tolerance 5%
Voltage	500	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature		°C.	
Dissipation Factor	0.0015	maximum @ 60 Hz.	

**MOTOR**  
Capacitors, Inc.



Motor Capacitors, Inc.

335 Beinoris Drive

Wood Dale, Illinois 60191

773-774-6666 (Phone) | 773-774-6690 (Fax)

[www.capacitorindustries.com](http://www.capacitorindustries.com)


[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Diameter (D)	1.26	0.02
Height (H)	2.20	0.04
M8 Stud	0.40	

Dimensions in inches

**Stamping**

Logo / Italfarad  
 RP-6 SH S0  
 4.0uF. +/-5% 500 VAC  
 25/085/21 50/60 Hz  
 RU, cRU, VDE, CE  
 Datecode  
 Made in Romania

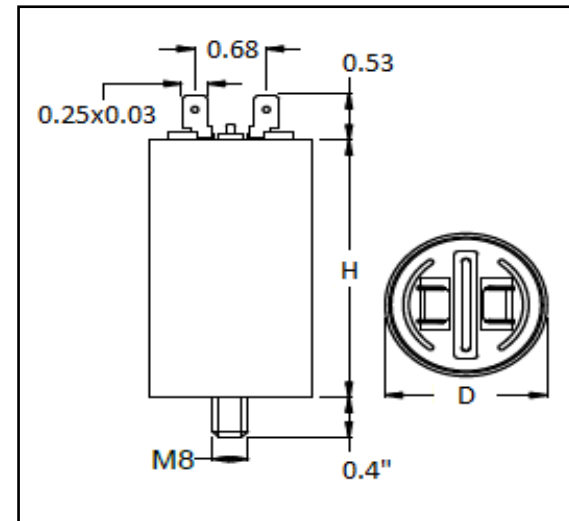

(with Mounting Stud, Lockwasher, and Hex Nut)

Engineer

*J.D. Aldana*

Date

March 15, 2016