

Part Number	RPN6F755M8	Revision	A
Customer P/N		Revision	A
Capacitance	7.5	uF.	Tolerance 5%
Voltage	500	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature		°C.	
Dissipation Factor	0.0015	maximum @ 60 Hz.	

MOTOR
Capacitors, Inc.




Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	1.41	0.03
Height (H)	2.75	0.03
M8 Stud	0.40	

Dimensions in inches

Stamping
Logo / Italfarad
RP-6 SH S0
7.5 uF. +/-5% 500 VAC
25/085/21 50/60 Hz
RU, cRU, VDE, CE
Datecode
Made in Romania

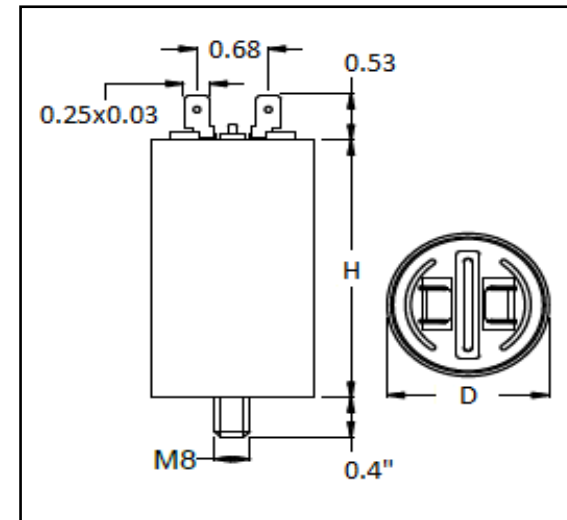

(with Mounting Stud, Lockwasher, and Hex Nut)

Engineer J.D Aldana
Date March 15, 2016