


MET-A-CAPS®

METALIZED MYLAR TYPE MMC

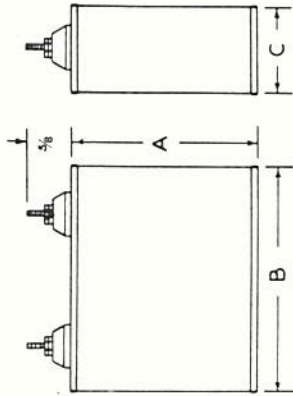

PART NO.	CAPACITY	VOLTS D.C.	CAN SIZE
MMC 256-1C	25	100	D1
MMC 306-1C	30		D2
MMC 406-1C	40		D3
MMC 506-1C	50		E1
MMC 606-1C	60		E2
MMC 806-1C	80		E4
MMC 107-1C	100		F1
MMC 127-1C	120		F2
MMC 157-1C	150		F4
MMC 207-1C	200		G1
MMC 257-1C	250	G1	
MMC 307-1C	300	H1	
MMC 407-1C	400	H2	
MMC 156-2C	15	200	D2
MMC 206-2C	20		D3
MMC 356-2C	25		E1
MMC 306-2C	30		E2
MMC 406-2C	40		E4
MMC 506-2C	50		F1
MMC 606-2C	60		F2
MMC 806-2C	80		F4
MMC 107-2C	100		G1
MMC 127-2C	120		G1
MMC 157-2C	150	H1	
MMC 207-2C	200	H2	
MMC 126-3C	12	300	H3
MMC 156-3C	15		E2
MMC 206-3C	20		E3
MMC 256-3C	25		F1
MMC 306-3C	30		F2
MMC 406-3C	40		F3
MMC 506-3C	50		F4
			G1
			H1
			H3


CAN SIZE	A	B	C
D1	2 1/2	2 1/2	1 3/8
D2	2 3/4	2 3/4	1 3/8
D3	3 1/4	2 3/4	1 3/8
E1	3 1/2	3 1/4	1 1/2
E2	3 3/4	3 3/4	1 1/2
E3	4 1/8	3 3/4	1 1/2
E4	4 1/8	3 3/4	1 1/2
F1	3 1/4	3 3/4	2 1/8
F2	3 3/8	3 3/4	2 1/8
F3	4 1/8	3 3/4	2 1/8
F4	4 1/8	3 3/4	2 1/8
G1	4	4 3/8	3 3/8
H1	4	4 3/8	3 3/8
H2	4 3/4	4 3/8	2 1/4
H3	6 1/8	4 3/8	3 1/4

METALIZED MYLAR

MMB CAPACITORS BATH

PART NO.	CAPACITY	VOLTS D.C.	CAN SIZE
MMB 126-1C	12	100	B1
MMB 156-1C	15		B2
MMB 206-1C	20		C2
MMB 505-2C	5		A1
MMB 755-2C	7.5		A3
MMB 106-2C	10	200	B1
MMB 126-2C	12		C3
MMB 305-3C	3		A1
MMB 505-3C	5		A3
MMB 755-3C	7.5		B1
MMB 106-3C	10	300	C1
MMB 105-4C	1.0		A1
MMB 205-4C	2.0		A3
MMB 305-4C	3.0		B1
MMB 405-4C	4.0		C1
MMB 505-4C	5.0	400	C3
MMB 504-6C	.5		A1
MMB 105-6C	1.0		B1
MMB 155-6C	1.5		B2
MMB 205-6C	2.0		C2

CAN SIZES	A	B	C	D
A1	1 13/16	1	3/4	2 1/8
A2	1 13/16	1	7/8	2 1/8
A3	1 13/16	1	1	2 1/8
B1	2	1 3/4	7/8	2 3/8
B2	2	1 3/4	1	2 3/8
C1	2	2	1	2 3/8
C2	2	2	1 1/8	2 3/8
C3	2	2	1 1/4	2 3/8

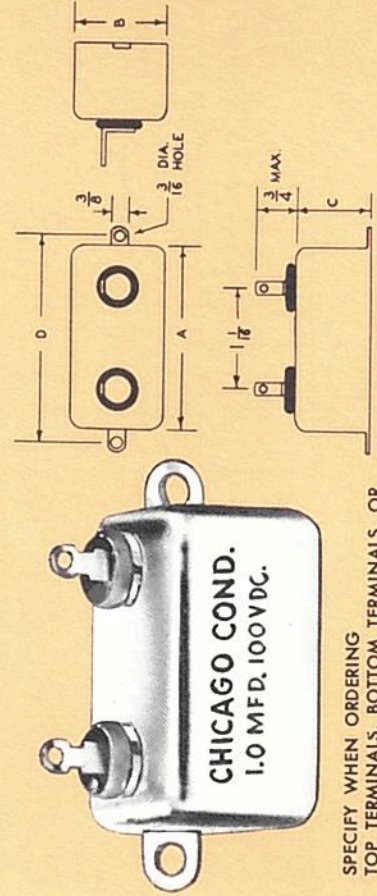

SPECIFY WHEN ORDERING TOP TERMINALS, BOTTOM TERMINALS, OR SIDE TERMINALS