


Part Number	ADP250F405J	Revision
Customer P/N	702884	Revision
Capacitance	4 uF.	Tolerance 5%
Voltage	250 VAC	
Dielectric	Metallized Polypropylene	
Terminal Type	Dual .250" X .03" Quick Connect Terminals	
Operating Temperature	-25 85 °C.	
Dissipation Factor	0.001	maximum @ 60 Hz.

# MOTOR Capacitors, Inc.


Motor Capacitors, Inc.  
335 Beinoris Drive  
Wood Dale, Illinois 60191  
773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Width (W)	1.54	0.03
Thickness (T)	0.67	0.03
Height (H)	1.02	0.03
Total Thickness (Tt)	1.06	0.03
Mounting Hole	0.18	0.02

*Dimensions in inches*

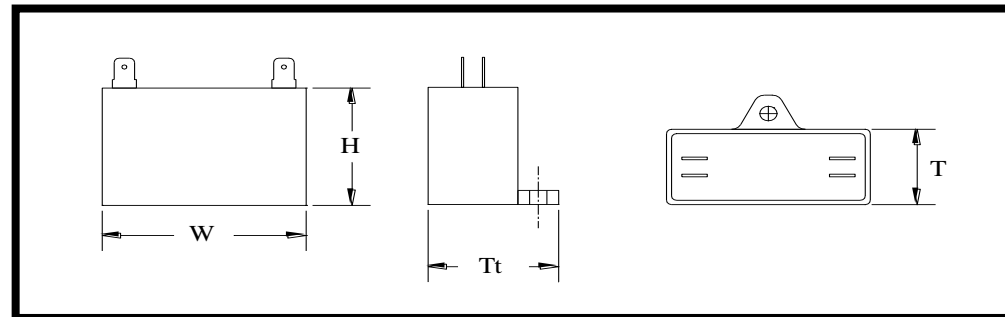

UL Approved Capacitor

	Stamping
	Logo/ADP
	4 uF 5% 250 VAC
	-25 - +85 C.
	50 - 60 Hz.
	Motor Cap - CBB61
	RU, cRU RoHs



Approval: J.D. Aldana  
Date: April 23, 2013