

Part Number	<b>CBB65-660R206</b>		Revision
Customer P/N			Revision
Capacitance	<b>20</b>	$\mu$ F.	Tolerance <b>5.0%</b>
Voltage	<b>660</b>	VAC	
Dielectric	<b>Metallized Polypropylene</b>		
Terminal Type	<b>.250" Quad-Spade Quick Connect Terminals</b>		
Operating Temperature	<b>-40 °C.-</b>	<b>85 °C.</b>	
Dissipation Factor	<b>0.001</b>	maximum @ 60 Hz.	

# MOTOR Capacitors, Inc.

**Motor Capacitors, Inc.**

335 Beinoris Drive

Wood Dale, Illinois 60191

773-774-6666 (Phone) | 773-774-6690 (Fax)

[www.capacitorindustries.com](http://www.capacitorindustries.com)

[info@capacitorindustries.com](mailto:info@capacitorindustries.com)


	Dimension	Tolerance
Diameter (D) Case/Cover	<b>1.97/2.06</b>	<b>0.06</b>
Case Height (H)	<b>4.92</b>	<b>0.06</b>
Terminal Height (K)	<b>0.56</b>	<b>ref.</b>
Terminal-Terminal (M)	<b>0.81</b>	<b>ref.</b>
Insulating Cup (dia.)	<b>0.74</b>	

*Dimensions in inches*

Stamping

**Wuxi - Motor Cap**  
**CBB65-660R206**  
**20uF 5% 660 VAC**  
**-40 - +85 C. 50/60 Hz.**

**Protected 10,000 AFC**  
**Non PCB    Date Code RoHs**

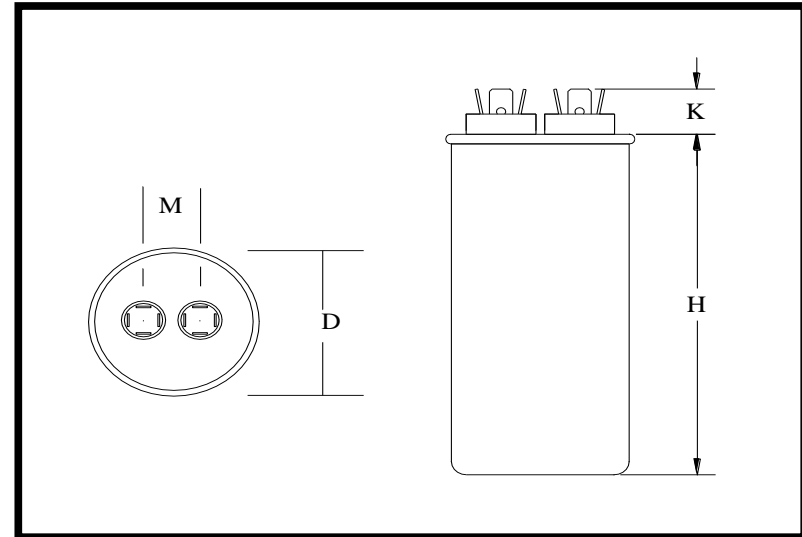

Approval :                   *J.D. Aldana*                    
Date :                   January 31, 2000