

Part Number	RPC2N206M8-M1		Revision	
Customer P/N			Revision	
Capacitance	20	uF.	Tolerance	5%
Voltage	450	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	Insulated Wire Leads			
Operating Temperature	-25	85	°C.	
Dissipation Factor	0.0015	maximum	@ 60 Hz.	

**MOTOR**  
Capacitors, Inc.




Motor Capacitors, Inc.  
335 Beinoris Drive  
Wood Dale, Illinois 60191  
773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Diameter (D)	1.65	0.02
Height (H)	3.15	0.06
M8 Stud	0.40	
Wire Length (G)	5.50	min.
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	Black	

*Dimensions in inches*

<b>Stamping</b>	Motor Cap / Italfarad
	RP-2 SH S0
	20 uF. +/-5% 450 VAC
	25/085/21 50/60 Hz
	RU, cRU, VDE, CE
	Datecode

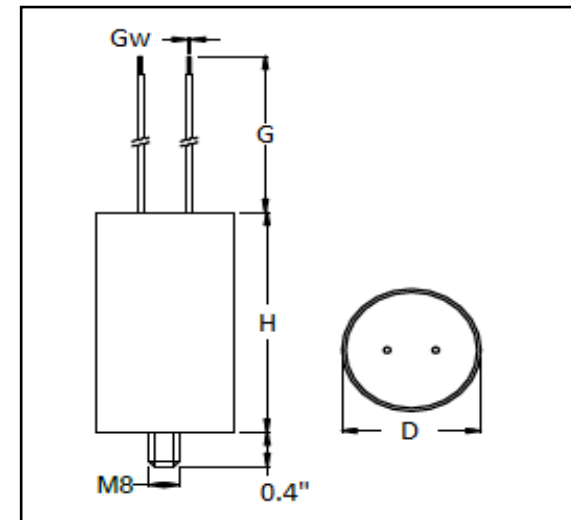

(with Mounting Stud, Lockwasher, and Hex Nut)

Engineer J.D. Aldana  
Date April 5, 2022