

Part Number	RPC2N505M8		Revision	A
Customer P/N			Revision	A
Capacitance	5	uF.	Tolerance	5%
Voltage	450	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	Insulated Wire Leads			
Operating Temperature			°C.	
Dissipation Factor	0.0015	maximum	@ 60 Hz.	


MOTOR
Capacitors, Inc.




Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	1.1	0.02
Height (H)	2.19	0.06
M8 Stud	0.40	
Wire Length (G)	5.50	min.
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	Black	

Dimensions in inches

	Stamping
	Logo / Italfarad
	RP-2 SH S0
	5 uF. +/-5% 450 VAC
	25/085/21 50/60 Hz
	RU, cRU, VDE, CE
	Datecode
Made in Romania	

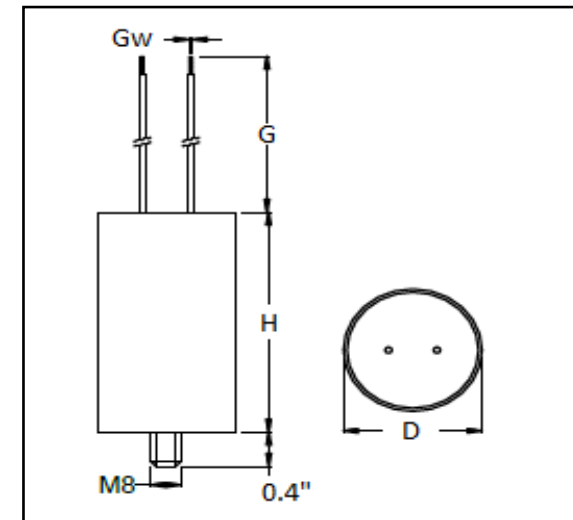

(with Mounting Stud, Lockwasher, and Hex Nut)

Engineer J.D. Aldana
Date March 17, 2016